



**PROFILI CON REGOLAZIONE SPESSORE ANTE**  
**PROFILES WITH DOORS THICKNESS ADJUSTMENT**

X= da 18 a 28 mm.  
to 18 from 28 mm.

**SERIE 2300/MIX (35 mm.)**

**Fermi standard/Stops standard**  
Art. 4407 Art. 5318

**Fermi ammortizzati/stops shock-absorbed**  
Art. 5357 Art. 5358 SX Art. 5358 DX

**PORTATA WEIGHT CAPACITY**  
65 kg


regolazione / adjustment  
fissaggio / fixing

**REGOLAZIONE DELLE ANTE**

La regolazione di perpendicolarità delle ante è effettuabile lateralmente.  
Possibilità di bloccaggio dopo la registrazione, sempre effettuabile lateralmente.

**DOOR ADJUSTMENT**


The adjustment of door perpendicularity is sideways practicable.  
Possibility to locking after the adjustment, always sideways practicable.

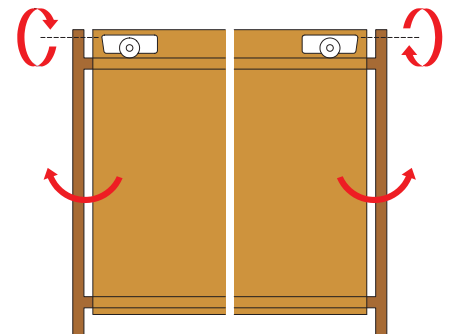

Art. 2053-4  
Kit anta interna  
internal door



Art. 2053-6/30  
Kit anta esterna  
external door (18/28 mm.)

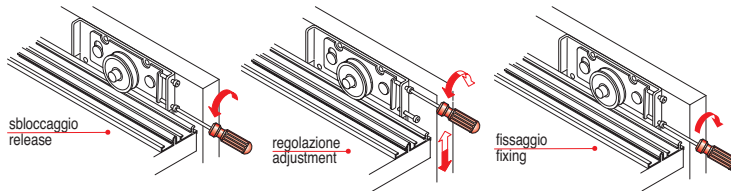

X= da 18 a 28 mm.  
to 18 from 28 mm.

**SERIE 2300/MIX (17 mm.)**

**Fermi standard/Stops standard**  
Art. 4407 Art. 5318





**Fermi ammortizzati/stops shock-absorbed**  
Art. 5357 Art. 5358 SX Art. 5358 DX


**PORTATA WEIGHT CAPACITY**  
65 kg

regolazione / adjustment  
fissaggio / fixing




**SERIE 2000 MIX (35 mm.)**


-  Art. 2053-4  
Kit anta interna  
internal door
-  Art. 2053-8  
Kit anta esterna  
external door (30 mm.)
-  Art. 2053-8/25  
Kit anta esterna  
external door (25 mm.)
-  Art. 2053-8/33  
Kit anta esterna  
external door (33 mm.)

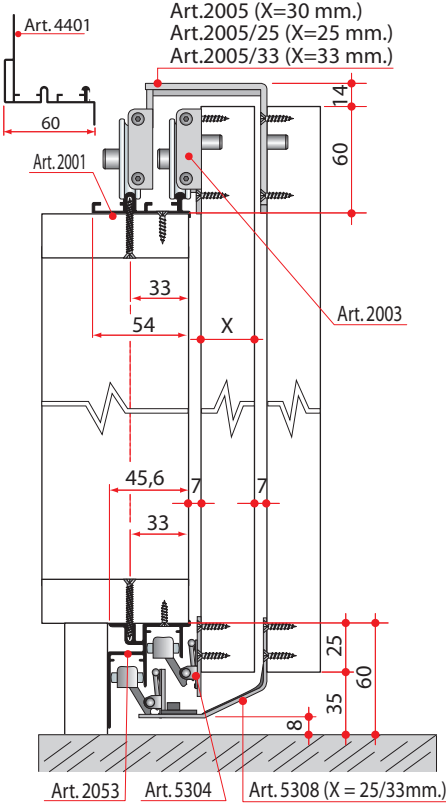


Art. 4401  
60  
Art. 2001  
33  
54  
X  
45,6  
7  
7  
33  
Art. 2003  
14  
60  
25  
35  
60  
8  
Art. 2053 Art. 5304 Art. 5308 (X = 25/33mm.)

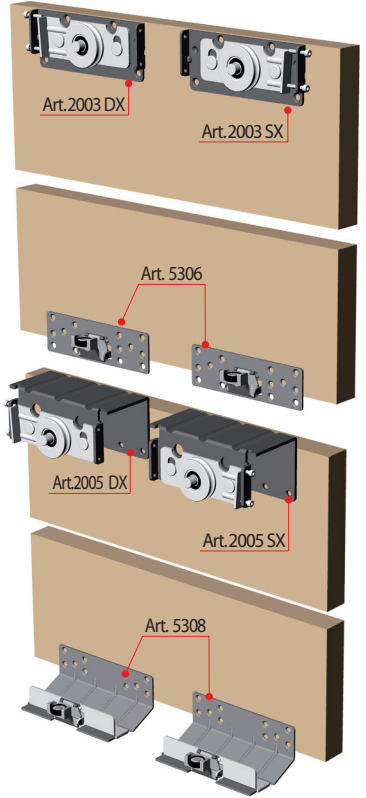


Art. 2003 DX Art. 2003 SX  
Art. 5306  
Art. 2005 DX Art. 2005 SX  
Art. 5308



1  
sbloccaggio  
release




2  
regolazione  
adjustment




3  
fissaggio  
fixing

**REGOLAZIONE DELLE ANTE**  
La regolazione di perpendicolarità delle ante è effettuabile lateralmente.  
Possibilità di bloccaggio dopo la registrazione, sempre effettuabile lateralmente.


**DOOR ADJUSTMENT**  
The adjustment of door perpendicularity is sideways practicable.  
Possibility to locking after the adjustment, always sideways practicable.

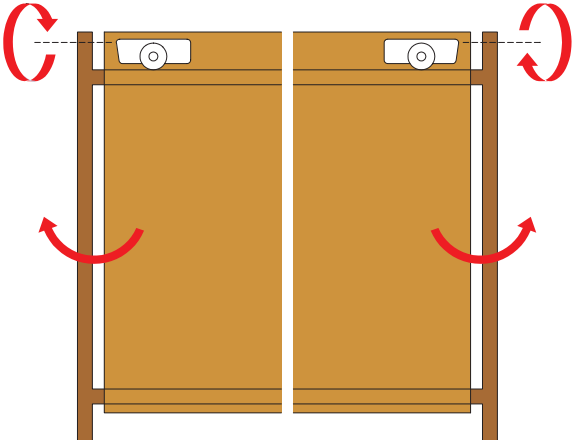


anta interna  
internal door



anta esterna  
external door




PORTATA  
WEIGHT CAPACITY



65 kg


**MONTAGGIO DELLE ANTE**  
Con l'anta inclinata appoggiare le ruote dei carrelli superiori nella sede del binario e premere alla base dell'anta per consentire l'inserimento a scatto della guida inferiore nel binario.

**ASSEMBLING OF DOORS**  
With the door at the slight angle, place the upper truck wheels on the rail and press the door base allowing the lower slider to click into position in the rail.

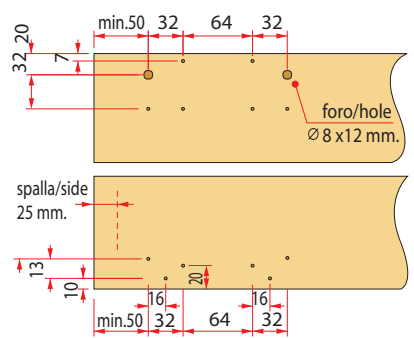


32 20  
7  
min.50 32 64 32  
foro/hole  
Ø 8 x12 mm.  
spalla/side  
25 mm.  
13  
10  
min.50 16 32 64 16 32

Fermi standard/Stops standard




Art. 4407 Art. 5318

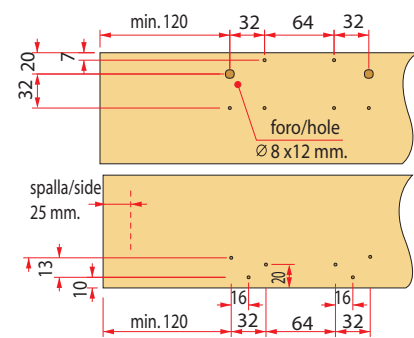

32 20  
7  
min.120 32 64 32  
foro/hole  
Ø 8 x12 mm.  
spalla/side  
25 mm.  
13  
10  
min.120 16 32 64 16 32

Fermi ammortizzati/stops shock-absorbed



Art. 5357 Art. 5358 SX Art. 5358 DX

